


## PROGRAMMING INSTRUCTIONS FOR DOSING PUMP

### HC 300 C

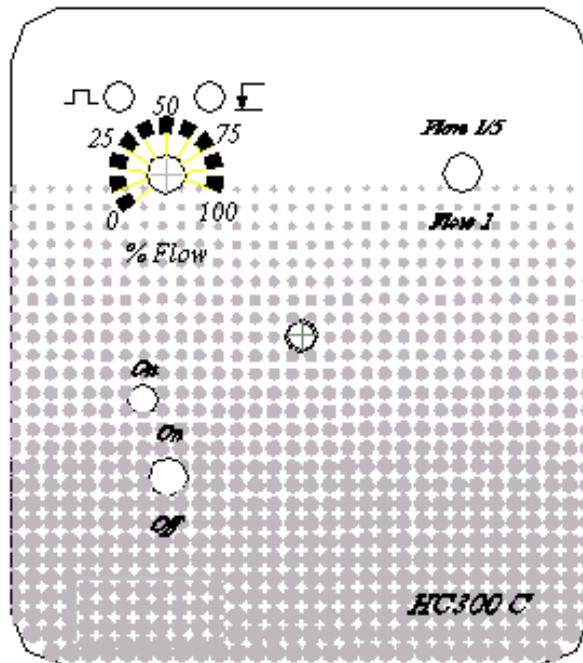

#### MODEL HC 300 C

The HC 300 C series are electromagnetic type pumps that have a manual stroke adjustment and are housed in a strong compact plastic case. The output volume is controlled by adjusting the number of pulses per minute, which is done by using the potentiometer on the front panel. You can adjust the pump between 0-100% or 0-20% of its maximum output. (0-120 pulses/minute) On the front panel there is a ON/OFF switch and 2 LEDS, one green ( pump on) the other a flashing RED (pump running). On the version with the level alarm there is an orange LED that lights when the dosed product is near the minimum level.

#### PROGRAMMING

These pumps are very simple to program. The pump can be turned on with an on/off switch on the front panel. The pumps output can be adjusted between 0 - 100% or 0-20% of its maximum output via the selector switch. Adjustment in each range is controlled by the potentiometer on the front panel. Each time the pump doses a red LED flashes.